



PLI / 6803 / 00768

2 JUL 2004



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 17 APR 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 17 March 2003

Best Available Copy

Patents Form 1/77

Patents Act 1977
(Rule 16)The
Patent
Office

THE PATENT OFFICE

24 JAN 2002

RECEIVED BY FAX

1/77

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet, from the Patent Office to help you fill in this form)

1. Your reference

GML2431

24 JAN 2002

2. Patent application number

(The Patent Office will fill in this part)

0201592.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)RCV Engines Limited
6 Haviland Road
Ferndown Industrial Estate
Wimborne
BH21 7RF24JAN02 E690533-1 D02806
P01/7700 0.00-0201592.3

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Great Britain

7988777002^{a/c}
8/7/02

4. Title of the invention

Engine and Crank Housing

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Barker Brettell
Medina Chambers
Town Quay
Southampton SO14 2AQ

Patents ADP number (if you know it)

07442494001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of Filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

Yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 8 ✓

Claim(s) *in*

Abstract

Drawing(s) 3 only ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Barker Brettell

24/01/02

Barker Brettell

12. Name and daytime telephone number of person to contact in the United Kingdom

G M Lomas

023 8033 6970

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

ENGINE AND CRANK HOUSING

The present invention relates to a housing assembly for an engine and crankcase and is concerned particularly, although not exclusively, with a housing assembly for a rotating cylinder valve engine and crankcase.

- 5 An example of a known rotating cylinder valve engine is described in the specification of PCT patent application no. PCT/GB97/01934 in the name of RCV Engines Limited. The engine casing and crankcase designs for such rotating cylinder engines have the two principle rotating components in separate casings. The housing comprises a cylinder jacket to house
10 the cylinder, a crank carrier to house the crankshaft and a third casing component with two flanges at 90 degrees to each other. The third casing component is used to hold these two casings in their correct relative orientation.

- The casing design for rotating cylinder engines has two main
15 requirements. Firstly it must firmly locate and retain the two principle rotating components, the crankshaft and rotating cylinder, in their correct relative positions at 90 degrees to one another. Secondly it should allow for the assembly of the engine, that is allow the piston to be inserted into the rotating cylinder and then the rotating cylinder and crank gears to be
20 meshed at the correct timing point.

- According to a first aspect of the present invention there is provided a housing assembly for a rotating cylinder valve engine comprising a rotary cylinder and a crank assembly, the housing assembly comprising a first casing part and a second casing part each formed with a respective
25 jointing face, the first casing part being formed with a tubular bore adapted to receive the rotary cylinder and being formed to partially house the crank assembly and the second casing part being formed to partially

house the crank assembly, the arrangement being such that in the assembled state the respective joining faces are in contact with each other and the plane of the joining faces is substantially perpendicular to the axis of rotation of the rotary cylinder.

- 5 Preferably, the arrangement is such that in the assembled state the axis of rotation of the crankshaft assembly is substantially aligned with the plane of the joining faces.

The rotating cylinder valve engine preferably comprises bearing means for the crankshaft assembly.

- 10 Preferably, the housing comprises a tubular portion for housing the bearing means, the tubular portion being defined by a semi-cylindrical section formed on the first casing part and a semi-cylindrical section formed on the second casing part, the arrangement being such that in the assembled state the tubular portion locates and retains the bearing means
15 for the crankshaft assembly.

Preferably, the jointing faces of the respective semi-cylindrical sections are substantially perpendicular to the axis of rotation of the rotary cylinder.

- The arrangement is preferably such that together, the jointing faces of the
20 respective semi-cylindrical sections forming the tubular portion are substantially in the same plane as the axis of rotation of the crankshaft assembly.

In a first embodiment of the present invention, in an assembled state the bearing means for the crankshaft assembly is preferably located between

a bevelled gear of the crankshaft assembly and a distal end of a crankshaft of the crankshaft assembly.

The bearing means preferably comprises at least two bearing units.

Alternatively, in a second embodiment of the present invention, a
5 crankshaft bevel gear is located between one of the bearing units and a
distal end of a crankshaft of the crankshaft assembly. Preferably, one of
the bearing units is located between a crank web and a crankshaft bevel
gear such that said bearing unit is distant from the semi-cylindrical
section formed on the first casing part. Preferably the bearing unit which
10 is distant from the semi-cylindrical section on the first casing part is
located and retained by a separate bearing clamping means.

Preferably, in the assembled state the first casing part houses the rotary
valve features of the engine. Alternatively, the first casing part of the
housing assembly comprises a third casing part connectable to the first
15 casing portion, the third casing portion being adapted to house the rotary
valve features of the engine. The rotary valve features of the engine may
include an inlet port, an outlet port, an ignition port and an exhaust port.

In a third embodiment of the first aspect of the present invention the first
casing part is formed with a flange that comprises the jointing face and
20 the second casing part is formed with a flange that comprises the jointing
face, the arrangement being such that in the assembled state the two
flanges form means for mounting the engine.

Preferably, the two flanges are each formed with corresponding holes
that are useable to mount the engine.

According to a second aspect of the present invention there is provided a method of assembling a rotating cylinder valve engine comprising a housing assembly according to the first aspect of the invention, the method comprising introducing a rotating cylinder into the tubular bore
5 of first casing part; then inserting a piston and conrod assembly into the rotating cylinder; then placing the crankshaft assembly in the semi-cylindrical section recess in the first casing part with a crankshaft gear meshed with a rotating cylinder gear at the correct timing point; and then
10 fastening the second casing part to the first casing part to locate and retain the crankshaft bearings.

Alternatively, there is provided a method of assembling a rotating cylinder valve engine comprising a housing assembly according to the second aspect of the invention, the method comprising introducing the rotating cylinder into the tubular bore of the first casing part; then
15 placing the crankshaft assembly the semi-cylindrical section recess in the second casing part; then fastening an inner bearing cap to the second casing part to locate and retain the inner crank bearing; then holding the crankshaft and rotating cylinder in position to ensure that when the gears mesh the engine will be correctly timed; then inserting the piston and
20 conrod assembly into the rotating cylinder; then fastening the second casing part to the first casing part to locate and retain the remaining outer crankshaft bearings.

The invention may include any combination of the features or limitations referred to herein.

25 The present invention may be carried into practice in various ways, but three embodiments will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows an exploded view of an engine and crankcase assembly according to a first embodiment of the present invention;

Figure 2 shows a cross section of the engine and crankcase assembly, shown in Figure 1, in an assembled state; and

- 5 Figure 3 shows a cross section of an engine and crankcase assembly according to a second embodiment of the present invention.

Rotating cylinder valve engines are known to the skilled person in the art. Rotating cylinder valve engines generally comprise a rotating cylinder wall and a reciprocating piston the linear motion of the
10 reciprocating piston is converted into the rotation of the cylinder wall. The rotation of the wall is utilised for the opening and closing of the inlet and outlet ports of the engine.

An example of a rotating cylinder valve engine is described in specification of PCT patent application no. PCT/GB97/01934 in the name
15 of RCV Engines Limited. The specification describes a rotating cylinder engine for a model aircraft. However, the skilled person in the art will realise that the engine described in this document may be adapted for many different applications.

By way of explanation of the present invention there follows with
20 reference to Figures 1 and 2 a procedure for manufacturing and assembling a rotating cylinder valve engine according to a first embodiment of the present invention.

A rotating cylinder valve engine 'A' comprises a combined housing 'B'. The combined housing 'B' comprises an upper casing part 1 and lower
25 casing part 2.

The upper casing part 1 comprises an upper mounting flange 19 that is formed with a jointing face 'C' and the lower casing part 2 comprises a lower mounting flange 20 that is formed with a jointing face 'D'. In the assembled state the upper mounting flange 19 and the lower mounting
5 flange 20 combine to form a full depth mounting lug.

The upper casing part 1 and lower casing part 2 are first machined to form their respective jointing faces. The upper casing part 1 and lower casing part 2 are then fastened together. A crankshaft bore 21 is then machined together with two outer crank bearing locating grooves 22.
10 The upper casing part 1 and lower casing part 2 are then disassembled and a rotary cylinder bore 15 machined in the upper casing part 1. Rotary valve features 14 are then machined into the upper casing part 1. A rotary cylinder bearing 12 is then pressed into the upper casing part 1. A rotary cylinder 4 is then assembled into the rotary cylinder bearing 12
15 and rotary cylinder bore 15.

A crankshaft assembly is then assembled by assembling a crank pinion 13, a crank pinion key 17, an inner crank bearing 7, a crank bearing spacer 6, two outer crank bearing locating rings 8, an outer crank bearing 5, a collet 10 and a prop driver 9 onto the crankshaft 3. A
20 piston conrod assembly 11 is then assembled onto the crankshaft 3 and held in place by a circlip 25.

A piston is now introduced into the bore of the rotary cylinder 4, and the crank shaft assembly laid in an upper semi-cylindrical recess 23 in the upper casing part 1 with the crank pinion 13 meshing with the rotary
25 cylinder 4 at the correctly timed point, and the outer crank bearing locating rings 8 inserted in the respective outer crank bearing locating grooves 22.

The lower casing part 2 is now fastened to the upper casing part 1 using six bolts 18. It will be appreciated that the upper mounting flange 19 and lower mounting flange 20 combine to form a full depth mounting lug.

5 With reference to Figure 3 the following is a procedure for manufacturing and assembling a rotating cylinder valve engine according to a second embodiment of the present invention, wherein the inner crank bearing 7 is situated between the crank pinion 13 and crank web 24.

10 The upper casing part 1 and lower casing part 2 are first machined to form their respective jointing faces. The inner crank bearing cap 16 is then suitably machined and fastened to the lower casing part 2. The upper casing part 1 and lower casing part 2 are then fastened together. The crankshaft bore 21 is then machined together with the two outer crank bearing locating grooves 22. During this operation the inner bore of the inner crank bearing cap 16 will be machined to the correct
15 tolerance to accept the inner crank bearing 7.

The upper casing part 1, lower casing part 2 and inner crank bearing cap 16 are then disassembled and the rotary cylinder bore 15 machined in the upper casing part 1. The rotary valve features 14 are then machined into the upper casing part 1. The rotary cylinder bearing 12 is then pressed
20 into the upper casing part 1. The rotary cylinder 4 is then assembled into the rotary cylinder bearing 12 and rotary cylinder bore 15.

The crankshaft assembly is then assembled by assembling the inner crank bearing 7, the inner crank bearing spacer 26, the crank pinion 13, the crank pinion key 17, the crank bearing spacer 6, the outer crank bearing
25 locating rings 8, the outer crank bearing 5, collet 10 and the prop driver 9 onto the crankshaft 3. The piston conrod assembly 11 is then assembled onto the crankshaft 3 and held in place by a circlip 25.

The crank shaft assembly is now laid in the lower semi-cylindrical recess 27 in the lower casing 2 with the outer crank bearing locating rings 8 inserted in the outer crank bearing locating grooves. The inner crank bearing cap is then fastened to the lower casing 2 to clamp the inner
5 crank bearing 7 in position.

The piston is now introduced into the bore of the rotary cylinder 4, and with the crank pinion 13 meshing with the rotary cylinder 4 at the correctly timed point, the lower and upper casings are brought together. The lower casing part 2 is now fastened to the upper casing part 1 using
10 the bolts 18.

The skilled person in the art will appreciate that the present invention provides a new design of housing which only requires two main casing parts, therefore reducing the complexity and cost of a rotating cylinder valve engine design and construction.

2/3

Fig 2


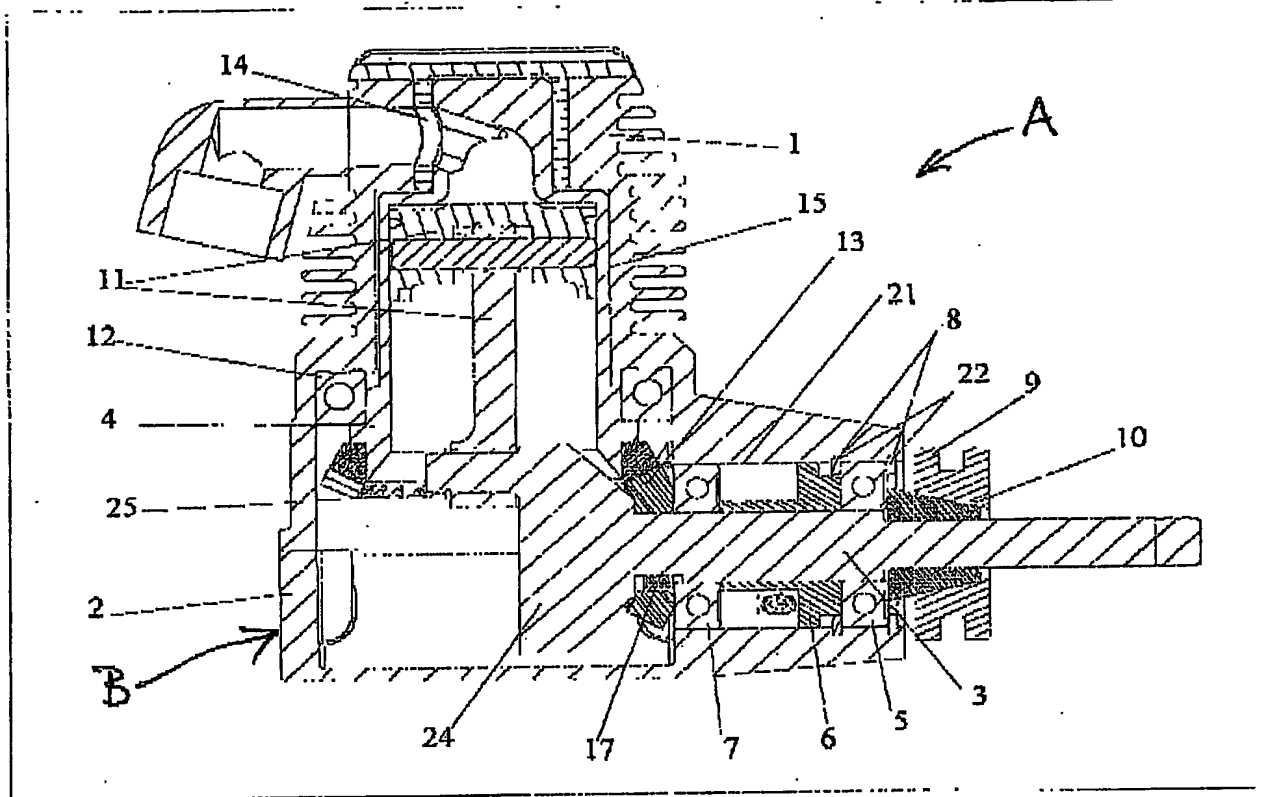


Fig 3

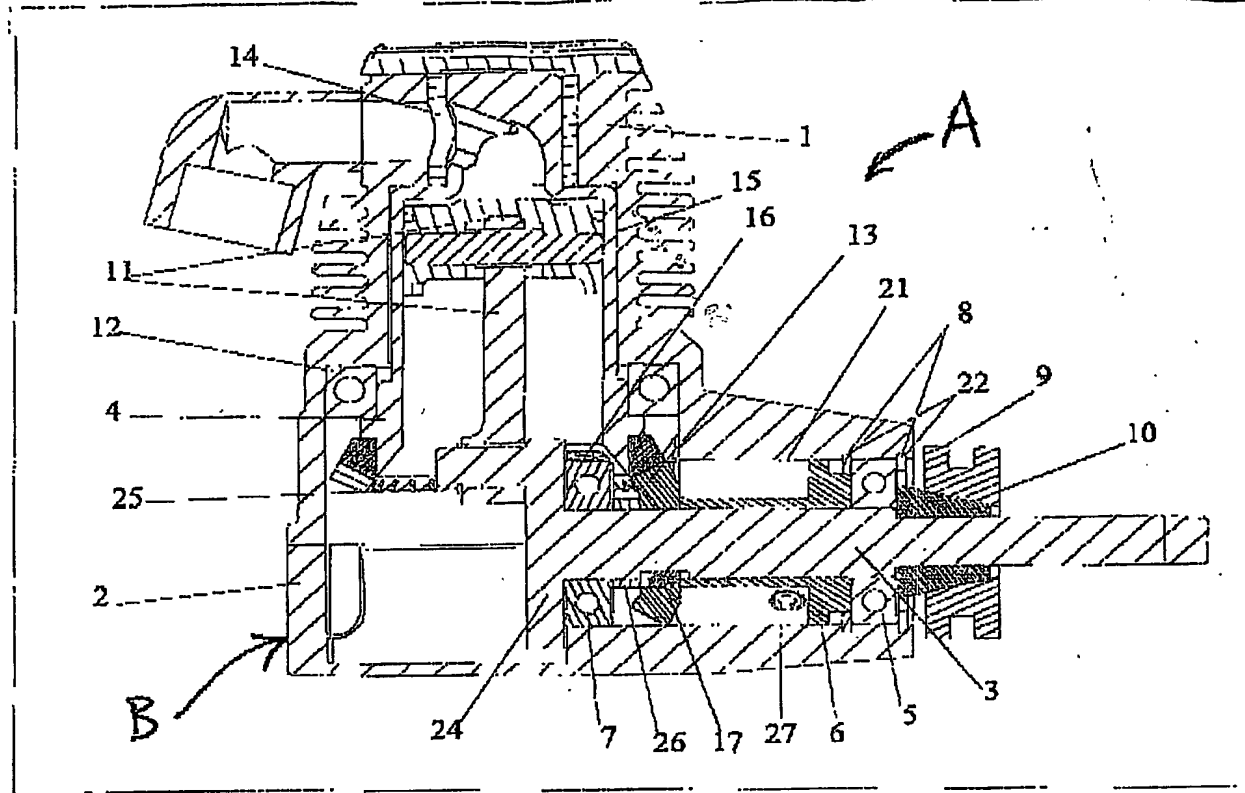

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.